


PMA8000 HARNESS ORDER SHEET (15806)

HARNESS IS NON CANCELLABLE AND NON RETURNABLE

NAME: _____ DATE: _____
 ADDRESS: _____ PHONE: _____
 _____ Ship Method: _____
 City: _____ State: _____
 Zip/Post Code: _____
 Visa/MC#: _____ Expiration: _____
 Aircraft Make & Model: _____

	Designation	Location	Base Price	Length (feet)	Price per foot	Total = Base + (cost per foot x length)
Intercom	LP	PMA8000 to Pilot Jacks	\$15.40		\$ 2.75	
	LC	PMA8000 to Copilot Jacks	\$15.40		\$ 2.75	
	L1 (if more than 2-place)	PMA8000 to Passenger 1 Jacks	\$15.40		\$ 2.75	
	HC (if more than 2-place)	Passenger 1 Phones to Passenger 2 Phones	\$ 6.60		\$ 1.15	
	H3 (if more than 2-place)	Passenger 1 Phones to Passenger 3 Phones	\$ 6.60		\$ 1.15	
	H4 (if more than 2-place)	Passenger 2 Phones to Passenger 4 Phones	\$ 6.60		\$ 1.15	
	M2 (if more than 2-place)	PMA8000 to Passenger 2 Mic	\$6.60		\$ 1.15	
	M3 (if more than 2-place)	PMA8000 to Passenger 3 Mic	\$6.60		\$ 1.15	
	M4 (if more than 2-place)	PMA8000 to Passenger 4 Mic	\$6.60		\$ 1.15	
	E1	PMA8000 to Music Jack	\$ 6.60		\$ 1.15	
E2	PMA8000 to Passenger Music Input	10.45		\$ 1.50		
Audio Panel	NC1	PMA8000 to Nav/Com 1				
		Com 1 Phones & Microphone	\$15.40		\$2.75	
		Nav 1 (if present)	\$6.60		\$ 1.15	
	NC2	PMA8000 to Nav/Com 2				
		Com 2 Phones & Microphone	\$15.40		\$ 2.75	
		Nav 2 (if present)	\$6.60		\$ 1.15	
	RX	PMA8000 to ADF, DME, AUX	# Rx			
	US	PMA8000 to unswitched audio	#Unsw			
		Specify number of unswitched audio sources, up to 4. Multiply \$5.00 by number of receivers, NOT length, if length is same as the as navcoms	\$7.70		\$1.00 per foot, per receiver)	
		Multiply by number of receivers (ADF, DME, etc)	\$ 6.60		\$ 1.15	
	PG	Power and Ground	\$ 7.70		\$ 0.20	
	SP	Cockpit Speaker	\$ 7.70		\$ 1.15	
	DIM	PMA8000 to radio dimmer bus	\$ 7.70		\$ 0.20	
	S	Optional Swap switch (switch not included)				
		Headset and Mic jacks added to the harness	\$ 9.63		# of sets	
		Total:				

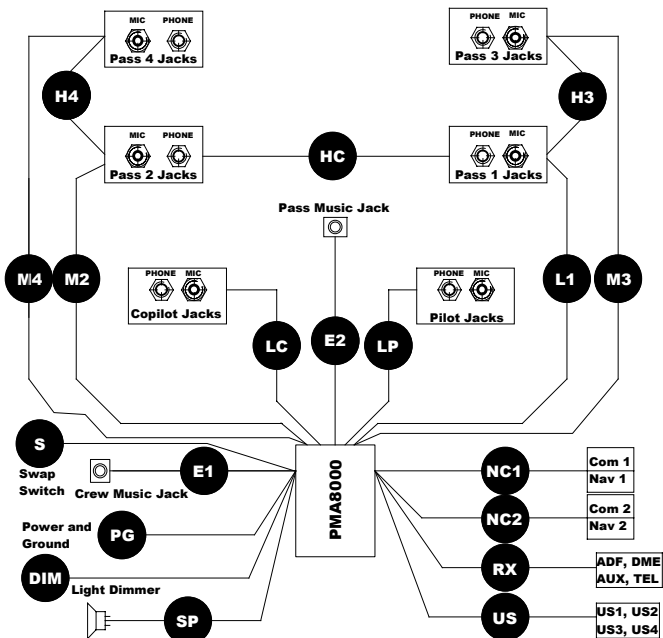

Notes:

Each harness is professionally manufactured using MilSpec, Tefzel shielded cable, and is clearly marked for easy identification using heat shrink labeling. Turn-around time is 2-business days from receipt of completed worksheet, or shipping is free.

Jacks are not included. Please add \$8.75 per set of mic and headphone jacks.

Special Instructions: _____

Rev 1, May 2004 P/N 15806